

# BOS – Left turn only- BOS-3036-R-35L

## Blank Out Sign

### General

- String Matrix BOS- White
- Access Type: Front
- MUTCD: R3-5L

### Construction

- 5052 aluminum alloy
- NEMA 3R
- Structural: AASHTO D1.2-120 mph

### Dimensions

- Height: 30" (762 mm)
- Length: 36" (914 mm)
- Depth: 5.5" (139.7 mm)
- Weight: 28 Lbs. (13 Kg)

### Electrical Requirements

- 24 VDC

### Complete System:

- Typical Power (Watt) 18

### Environmental

- Operating Temperature: -30°F to +165°F  
(-34°C to +74°C)
- Storage Temperature: -40°F to +185°F  
(-40°C to +85°C)
- Humidity: 0% to 99% non-condensing

### Control Options:


- Dry Contact
- Remote IP relay
- SCU6V3 Controller- NTCIP compliant

### Optional Equipment:

- Light Sensor

### Optical Performance

- Color:
- White: (6500k+nm)

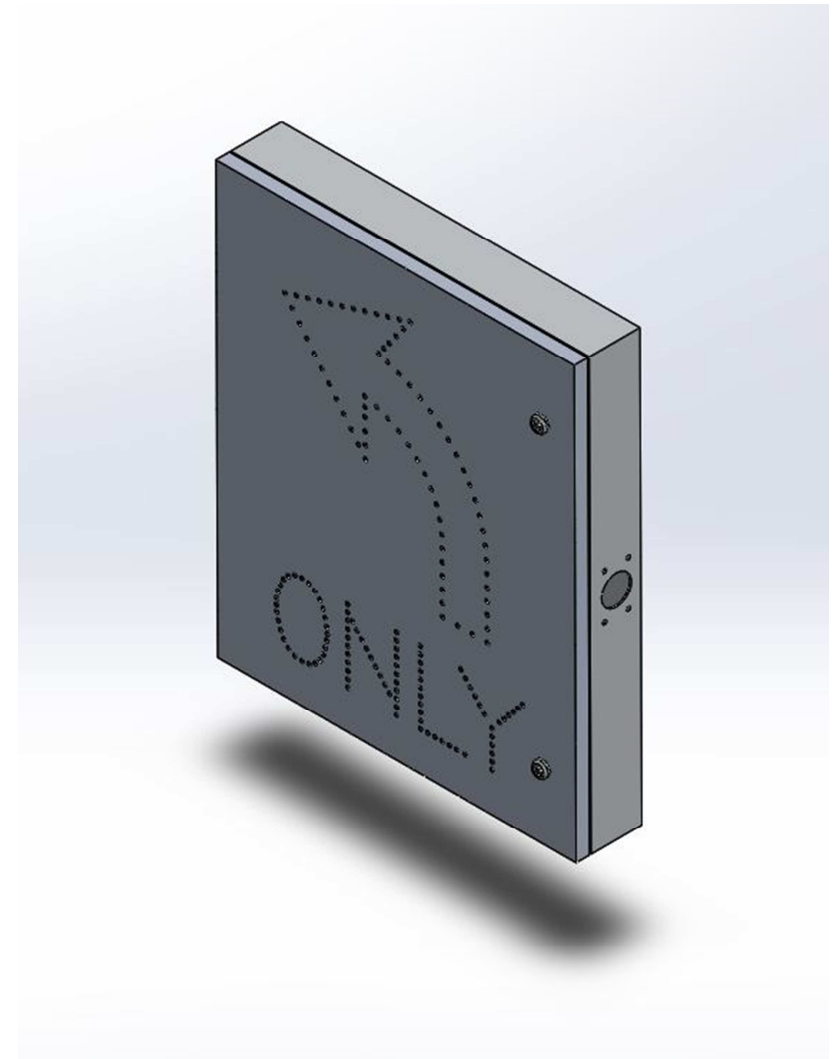

SES America, Inc  
410 Harris Road, Smithfield RI02917  
401.232.3370 [www.sesamerica.com](http://www.sesamerica.com)

### Related products:

Multi-DMS controller SCU6/SCU3 – Control software: Messenger

Note: SESA policy is to constantly improve its product, all product descriptions are subject to change