

BOS – No Right Turn- BOS-R3-1

Blank Out Sign

General

- String Matrix BOS-Red & White
- Access Type: Front
- MUTCD Symbol: R3-1

Construction

- 5052 aluminum alloy
- NEMA 3R
- Structural: AASHTO D1.2-120 mph

Dimensions

- 30"x30" (762x762mm)
- 42"x42" (1066x1066mm)
- Depth: 5.5" (139.7 mm)
- 30x30 Weight: 28 Lbs. (13 Kg)
- 42x42 Weight: 32 Lbs. (14.515 Kg)

Electrical Requirements

- 24 VDC

Complete System:

- 30x30 Typical Power (Watt) 23
- 42x42 Typical Power (Watt) 27

Environmental

- Operating Temperature: -30°F to +165°F (-34°C to +74°C)
- Storage Temperature: -40°F to +185°F (-40°C to +85°C)
- Humidity: 0% to 99% non-condensing

Control Options:


- Dry Contact
- Remote IP relay
- SCU6V3 Controller- NTCIP compliant

Optional Equipment:

- Light Sensor

Optical Performance

- Color:
- Red (618-630nm)
- White: (6500k+nm)

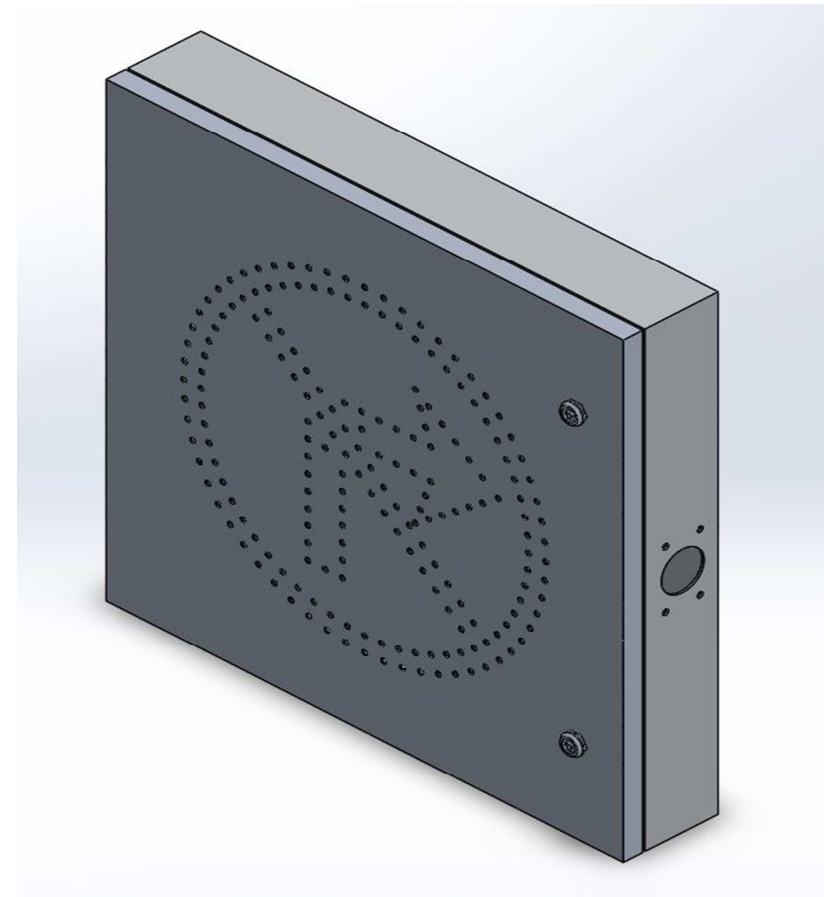

SES America, Inc
410 Harris Road, Smithfield RI02917
401.232.3370 www.sesamerica.com

Related products:

Multi-DMS controller SCU6/SCU3 – Control software: Messenger

Note: SESA policy is to constantly improve its product, all product descriptions are subject to change