

General

- String Matrix BOS-Red, White, Amber & GRN
- Access Type: Front
- MUTCD Symbol: NA

Construction

- 5052 aluminum alloy
- NEMA 3R
- Structural: AASHTO D1.2-120 mph

Dimensions

- Height: 30" (762 mm)
- Length: 30" (762 mm)
- Depth: 5.5" (139.7 mm)
- Weight: 28 Lbs. (13 Kg)

Electrical Requirements

- 24 VDC

Complete System:

- Power (Watt) 23

Environmental

- Operating Temperature: -30°F to +165°F (-34°C to +74°C)
- Storage Temperature: -40°F to +185°F (-40°C to +85°C)
- Humidity: 0% to 99% non-condensing
-

Control Options:


- Dry Contact
- Remote IP relay
- SCU6V3 Controller- NTCIP compliant

Optional Equipment:

- Light Sensor

Optical Performance

- Color: Amber (590nm)
- White (6500k+nm)
- Red (618-630nm)
- GRN (555-565nm)

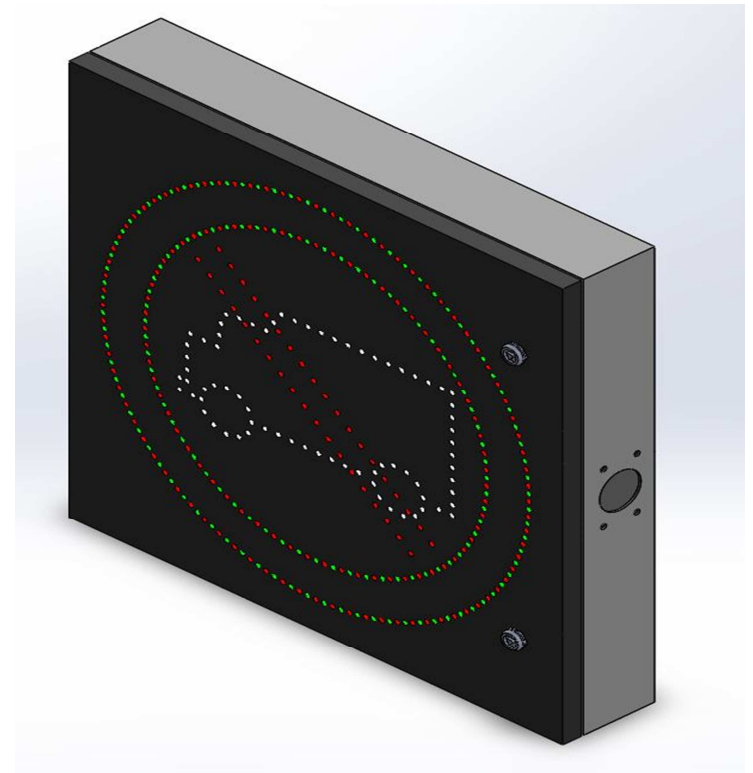

Related products:

Multi-DMS controller SCU6/SCU3 – Control software: Messenger

Note: SESA policy is to constantly improve its product, all product descriptions are subject to change

