

General

- String Matrix BOS-Amber & White
- Access Type: Front
- MUTCD Symbol: W11-2

Construction

- 5052 aluminum alloy
- NEMA 3R
- Structural: AASHTO D1.2-120 mph

Dimensions

- Height: 30" (762 mm)
- Length: 30" (762 mm)
- Depth: 5.5" (139.7 mm)
- Weight: 28 Lbs (13 Kg)

Electrical Requirements

- 24 VDC

Complete System:

Power (Watt) 20

Environmental

- Operating Temperature: -30°F to +165°F
(-34°C to +74°C)
- Storage Temperature: -40°F to +185°F
(-40°C to +85°C)
- Humidity: 0% to 99% non-condensing

Control Options:


- Dry Contact
- Remote IP relay
- SCU6V3 Controller- NTCIP compliant

Optional Equipment:

- Light Sensor
-

Optical Performance

- Color: Amber (590nm)
- White: 6500k+

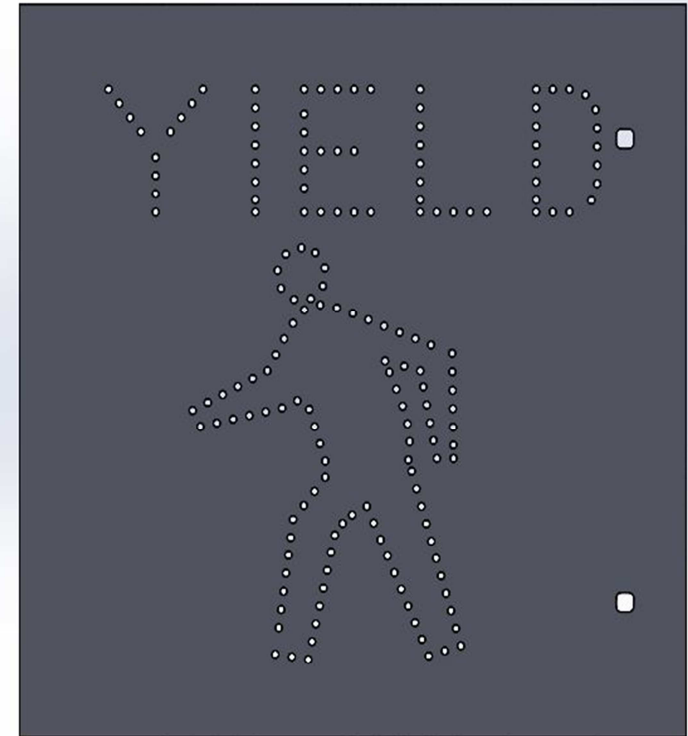

Related products:

Multi-DMS controller SCU6/SCU3 – Control software: Messenger

Remote IP relay for Simple remote operation

Note: SESA policy is to constantly improve its product, all product descriptions are subject to change



SESA America, Inc
410 Harris Road, Smithfield RI02917
401.232.3370 www.sesamerica.com